

# Pneumatic Pump



## **2" Slurry Valve Pneumatic Diaphragm Pump Yellow Series P50SV03**

- Weighs 21kg
- Lubrication Free
- Self Priming
- Pumps 46mm suspended solids

A general purpose pump designed for heavy duty applications



Australian Designed  
Australian Manufactured  
Australian Owned

# RFG Sales & Spares Pty Ltd




*"We service what we sell"*

24C Besser Crescent, Camdale, Tasmania. 7320. P: 6435 1544 • F: 6435 2959 • E: rfgsales@bigpond.com • www.rfgsales.com.au

# Pneumatic Pump



Flow rate: 0-500 L/min  
 Air Consumption: Up to 80 scfm  
 Air Pressure: Up to 100psi  
 Fluid Connection: 2 inch (Internal Thread)  
 Air Inlet Connection: 1/2 inch (Internal Thread)

Air Exhaust Connection: 3/4 inch (Internal Thread)  
 Delivery Pressure: Tested to 600kPa  
 Suction Pressure: Tested to -80kPa Dry Vacuum  
 Particle Size: Up to 46mm Suspended Solids  
 Weight: 21kg

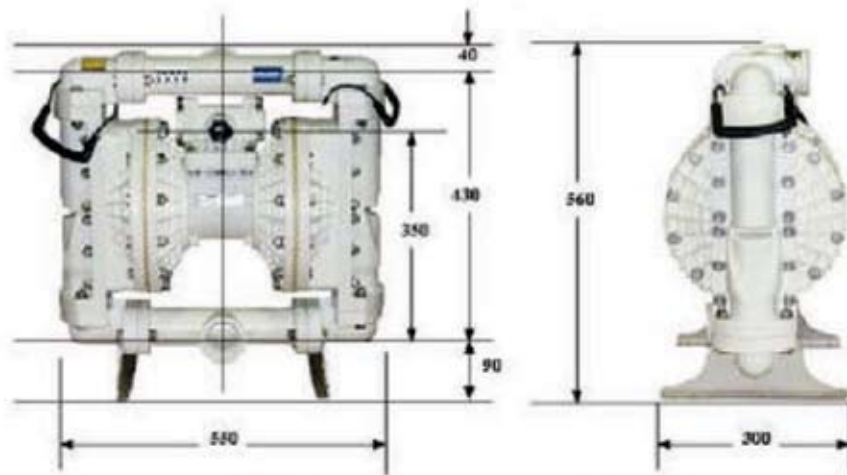

**DO NOT EXCEED 125 PSI AIR SUPPLY PRESSURE**

■ = AIR PRESSURE IN PSI     ■ = AIR CONSUMPTION IN CFM

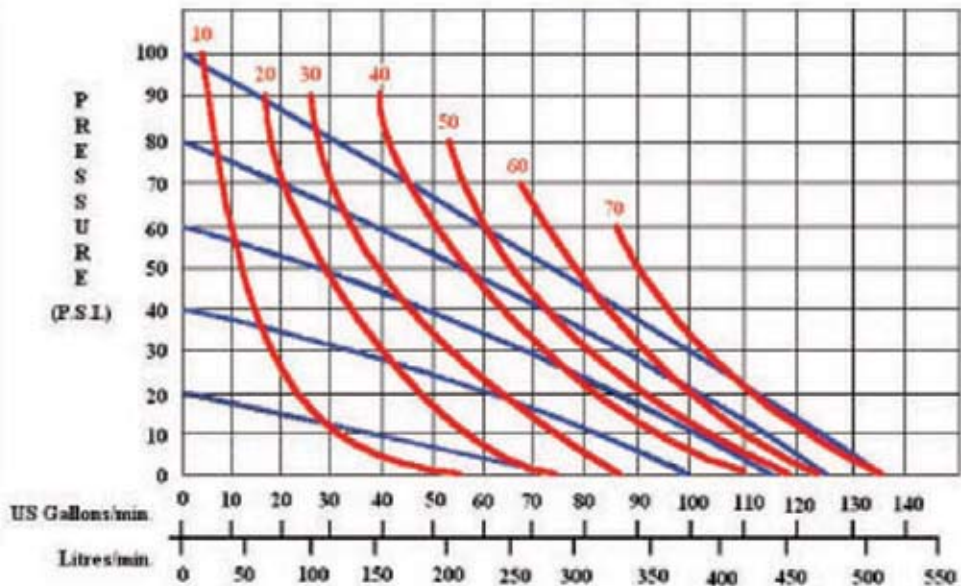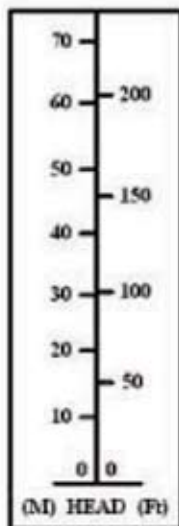

PUMP CAPACITY

## RFG Sales & Spares Pty Ltd



*" We service what we sell "*