

Pneumatic Pump



2" Slurry Valve Pneumatic Diaphragm Pump Yellow Series P50SV03

- Weighs 21kg
- Lubrication Free
- Self Priming
- Pumps 46mm suspended solids

A general purpose pump designed for heavy duty applications



Australian Designed
Australian Manufactured
Australian Owned

RFG Sales & Spares Pty Ltd




"We service what we sell"

24C Besser Crescent, Camdale, Tasmania. 7320. P: 6435 1544 • F: 6435 2959 • E: rfgsales@bigpond.com • www.rfgsales.com.au

Pneumatic Pump


Flow rate: 0-500 L/min
 Air Consumption: Up to 80 scfm
 Air Pressure: Up to 100psi
 Fluid Connection: 2 inch (Internal Thread)
 Air Inlet Connection: 1/2 inch (Internal Thread)

Air Exhaust Connection: 3/4 inch (Internal Thread)
 Delivery Pressure: Tested to 600kPa
 Suction Pressure: Tested to -80kPa Dry Vacuum
 Particle Size: Up to 46mm Suspended Solids
 Weight: 21kg

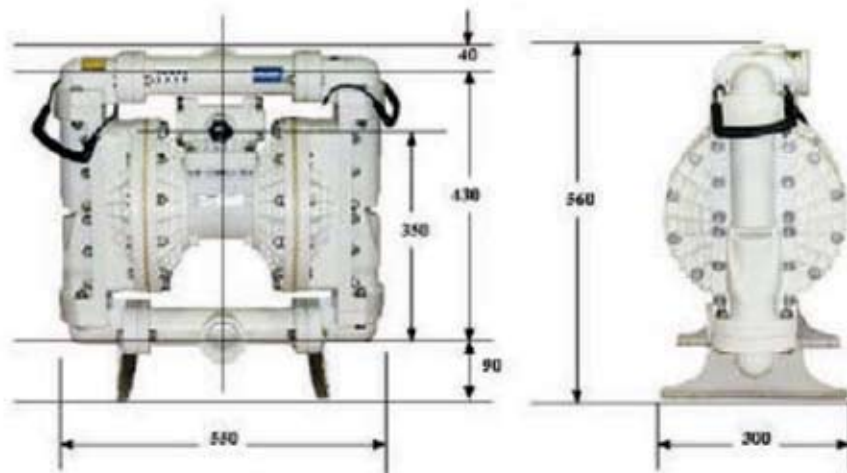

**DO NOT EXCEED 125 PSI
 AIR SUPPLY PRESSURE**

■ = AIR PRESSURE IN PSI ■ = AIR CONSUMPTION IN CFM

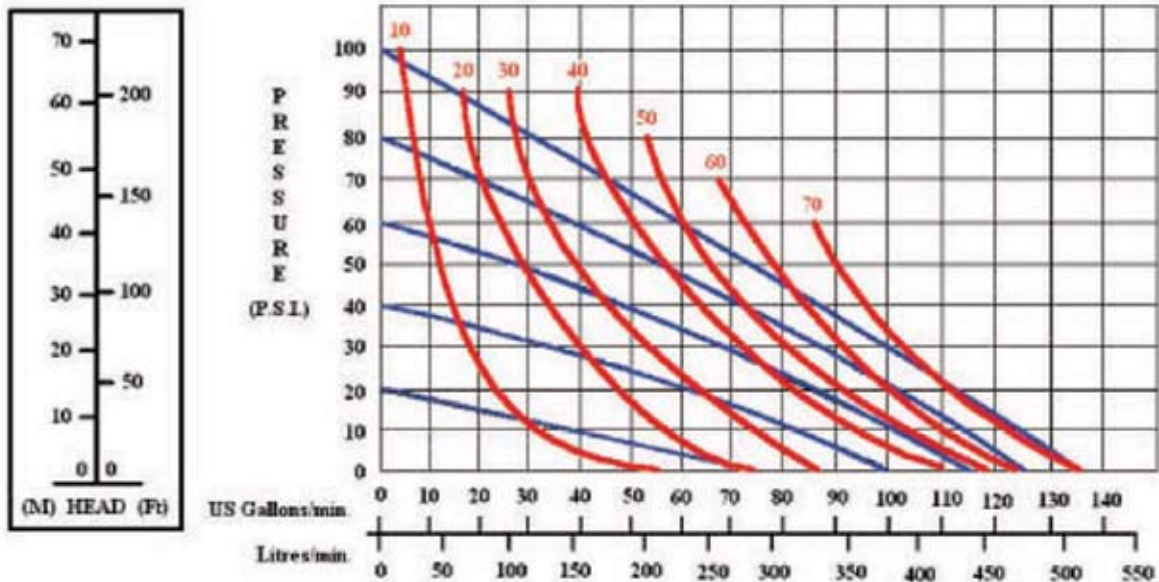

PUMP CAPACITY

RFG Sales & Spares Pty Ltd



" We service what we sell "