

# RFG CABLE TENSIONER

## SPECIFICATIONS

**Stressing Jack:** All steel construction with hardchrome plated rods. Bronze overlay on piston glands.

**Weight:**

**25 Tonne Jack**-18kg (approx. 42kg complete tensioner unit)

**10 Tonne Jack**-8kg (approx. 32kg complete tensioner unit)

**Capacity:**



Theoretically **25 tonne** @  
10,000PSI/700BAR approx.

Theoretically **10 tonne** @  
10,000PSI/700BAR approx.

**Stroke:** 150mm standard

**Centre Hole:** 24mm diameter

**Strand Size:** .6 standard  
wedget set for 15.2mm cable

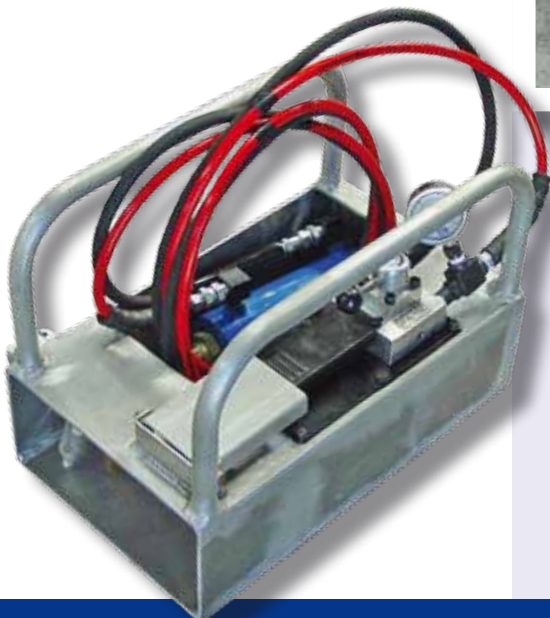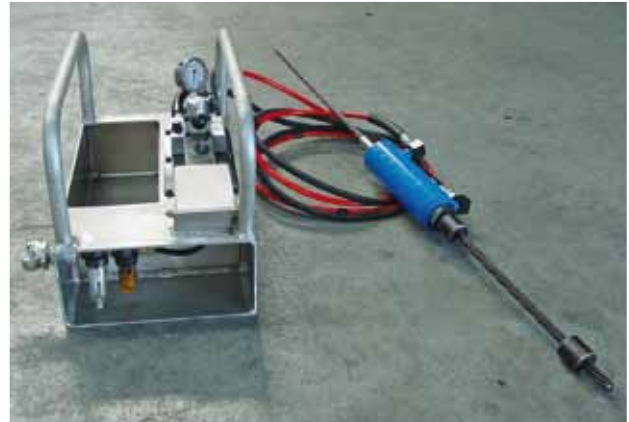

**Power Pack:** Housed in all aluminium carry tray & oil tank

**Dimensions:** 500mm(L)  
x 330mm(W) x 365mm (high - to  
top of handles).

**Air Supply:** 20CFM (.57m<sup>3</sup>/min.)  
& 100PSI (7BAR) @ the pump.  
Air pressure should be regulated  
to a maximum of 140PSI. (9BAR)

**Pump unit:** Fitted with hand  
operated bi-directional valve to  
operate double acting stressing jack  
through 2x3m long hydraulic hoses.  
Pump activated by foot pedal. Fitted  
with airline lubricator & filter/water  
separator.

**Oil Pressure:** Internal relief valve set  
@ 10,000PSI (700BAR approx.)

## RFG Sales & Spares Pty Ltd



*"We service what we sell"*