

DT Airlegs



Features:


- **Double Telescopic**
- **Smooth Independent Control**
- **Robust**
- **Lightweight**

DT Airlegs are robust yet lightweight with long double telescopic feed extensions, made in special tough corrosion-resistant alloy. Their optimum performance in production and development mining has set the 'industry standard' for major mining companies over a number of years.

Smooth, independent feed control, power assisted push button retraction and long feed extensions allow fast and easy collaring, back holes drilling and less repositioning in both small and large cross-sections for increased operator safety and convenience while giving improved performance. These airlegs are ideally matched to the rock drills.

5 Models & Options

With standard models and options available, the DT Airleg range can be quickly attached to rockdrills, to suit most applications. *The compressed air line oiler ranges PLO and POB 15 are ideally suited to lubricate both the airleg and the rockdrill.*

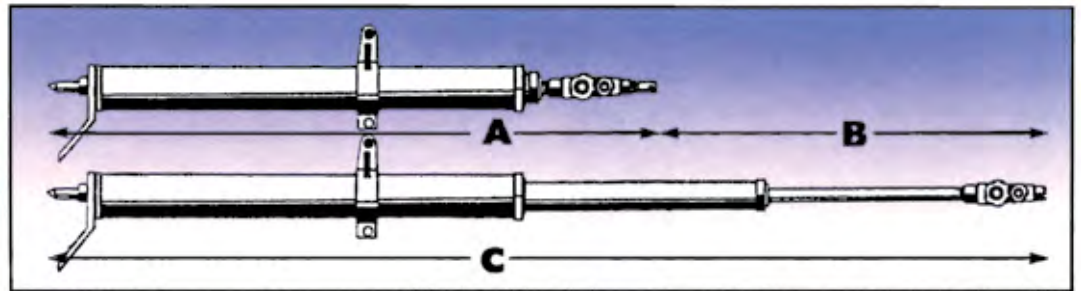

TYPE	DT50	DT100	DT140	DT180	DT200
Length retracted (A)	875mm	1120mm	1305mm	1505mm	1645mm
Stroke (B) Double telescopic	545mm	1040mm	1440mm	1840mm	2100mm
Length extended (C)	1420mm	2160mm	2745mm	3345mm	2100mm
Weight	11.9kg	13.3kg	15.0kg	16.6kg	18.1kg
Diameters	78/65mm	78/65mm	78/65mm	78/65mm	78/65mm
Pressure Range	3-7 Bar (43-100PSI)	3-7 Bar (43-100PSI)	3-7 Bar (43-100PSI)	3-7 Bar (43-100PSI)	3-7 Bar (43-100PSI)
Optimum Pressure	5-6 Bar (71-86PSI)	5-6 Bar (71-86PSI)	5-6 Bar (71-86PSI)	5-6 Bar (71-86PSI)	5-6 Bar (71-86PSI)

RFG Sales & Spares Pty Ltd



"We service what we sell"

24C Besser Crescent, Camdale, Tasmania. 7320. P: 6435 1544 • F: 6435 2959 • E: rfgsales@bigpond.com • www.rfgsales.com.au